

MEETS STANDARDS FOR



EN ISO:3059

Wavelength & Intensity

SPECTROLINE®

OPTI-LUX™ 365 SERIES

UV-A LED Inspection Lamps

OLX-365 Series

Spot Fluorescent Indications in the Smallest of Spaces



**RECHARGEABLE
BATTERY**



**BRIGHT &
UNIFORM BEAMS**



**INSTANT-ON
OPERATION**



**SMALL SPACE
INSPECTION**

**CONVENIENT
ON/OFF SWITCH**
for easy one-handed
operation



**ULTRA
VIOLET
LED**

**ANODIZED ALUMINUM
LAMP BODY**

minimizes corrosion and
stands up to years of heavy use



**CERTIFICATE OF
LIGHT OUTPUT**
included with lamp

**4 AVAILABLE IN
MODELS:**

High-Intensity & Standard-Intensity
both with and/or without black light filters

MODEL	HIGH INTENSITY	STANDARD INTENSITY	CLEAR FILTER	INTERNAL BACK LIGHT FILTER	NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) ①	VISIBLE LIGHT MEASUREMENT	UV-A COVERAGE AREA at 15 in (38 cm) at minimum 1,200 $\mu\text{W}/\text{cm}^2$
OLX-365	●		●		10,000 $\mu\text{W}/\text{cm}^2$	0.8 foot-candles (8.6 lux)	2 in (5 cm)
OLX-365B	●			●	10,000 $\mu\text{W}/\text{cm}^2$	0.4 foot-candles (4.3 lux)	2 in (5 cm)
OLX-365FL		●	●		4,500 $\mu\text{W}/\text{cm}^2$	0.3 foot-candles (3.2 lux)	2.5 in (6.3 cm)
OLX-365BFL		●		●	4,500 $\mu\text{W}/\text{cm}^2$	0.2 foot-candles (2.1 lux)	2.5 in (6.3 cm)

Light Source: UV-A LED
Lamp Style: Cordless flashlight
Lamp Head Diameter: 1.25 in (3.2 cm)
Length: 5.9 in (15 cm)
Power Requirements: One 3.7V 2200mA/Hr lithium-ion battery (rechargeable)
Weight (w/Battery): 4.6 oz (130 g)
Run Time: 4 hours (continuous)
Charge Time: 4 hours (one or two batteries)
Charging Cradle: Two-battery capability with AC/DC cord sets (100-120V/50-60Hz) *

① UV-A intensity reading taken with the Spectroliner® AccuMAX™ Series meter, and is factory set to the value shown.




*Available in 230V and 240V versions




OPTI-LUX™ 365 SERIES FLASHLIGHTS

comes complete with OPX-365 UV lamp, two rechargeable batteries, smart charging cradle with AC/DC cord sets, UV-absorbing spectacles, lanyard, belt holster and a padded carrying case.


High Intensity UV-A Beam Profile

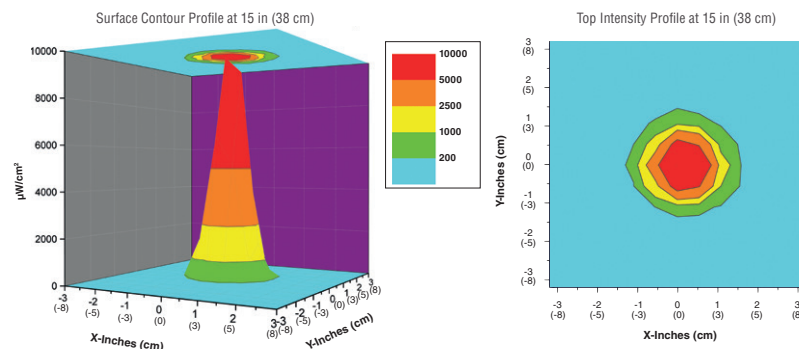

Standard Intensity UV-A Beam Profile

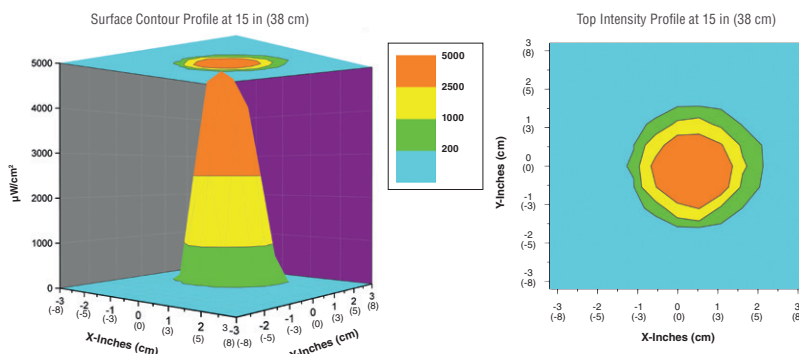

Normalized UV Irradiance

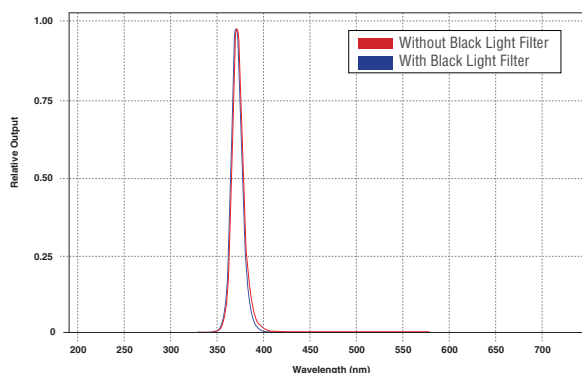

Select Wavelength With and Without Black Light Filter

